

# Datasheet

## Galaxy Station - Large

CAT NO. 659185



<b>Operating Voltage</b>	POE 48V
<b>IP Rating</b>	IP67
<b>Wireless Transmission</b>	915 – 928 MHz
<b>Power Consumption</b>	15W
<b>Connection</b>	RJ45 (Ethernet 10/100)
<b>Wireless coverage vertical*</b>	20 floors from center (+/- 10 floors)
<b>Wireless coverage horizontal*</b>	Up to 2km in direct line of sight Up to 500m range in urban situation
<b>Operating Temperature</b>	-20°C to 55°C
<b>Humidity</b>	95%
<b>Impact resistance</b>	IK08
<b>UV resistance</b>	UL508
<b>User Interface</b>	Power indicator : Green = On
<b>Weight</b>	2kg
<b>Compliance</b>	IEC 60950-1 AS-NZS4268

\*Coverage will vary depending on the environment and application. A site survey MUST be done to determine the best position of the Galaxy Station for optimum coverage.



**GALAXY™**  
CONNECTED EMERGENCY LIGHTING SYSTEM




# Galaxy Station - Large

CAT NO. 659185



- Wireless long range and deep indoor coverage
- Bidirectional communications with emergency luminaries
- Network and application encryptions ensures two levels of security during communications
- Adaptive Data Rate (ADR) transmission ensures all luminaries are connected within range
- Plug and play into existing IT infrastructure for ease of remote access
- 5 year warranty

## Dimensions

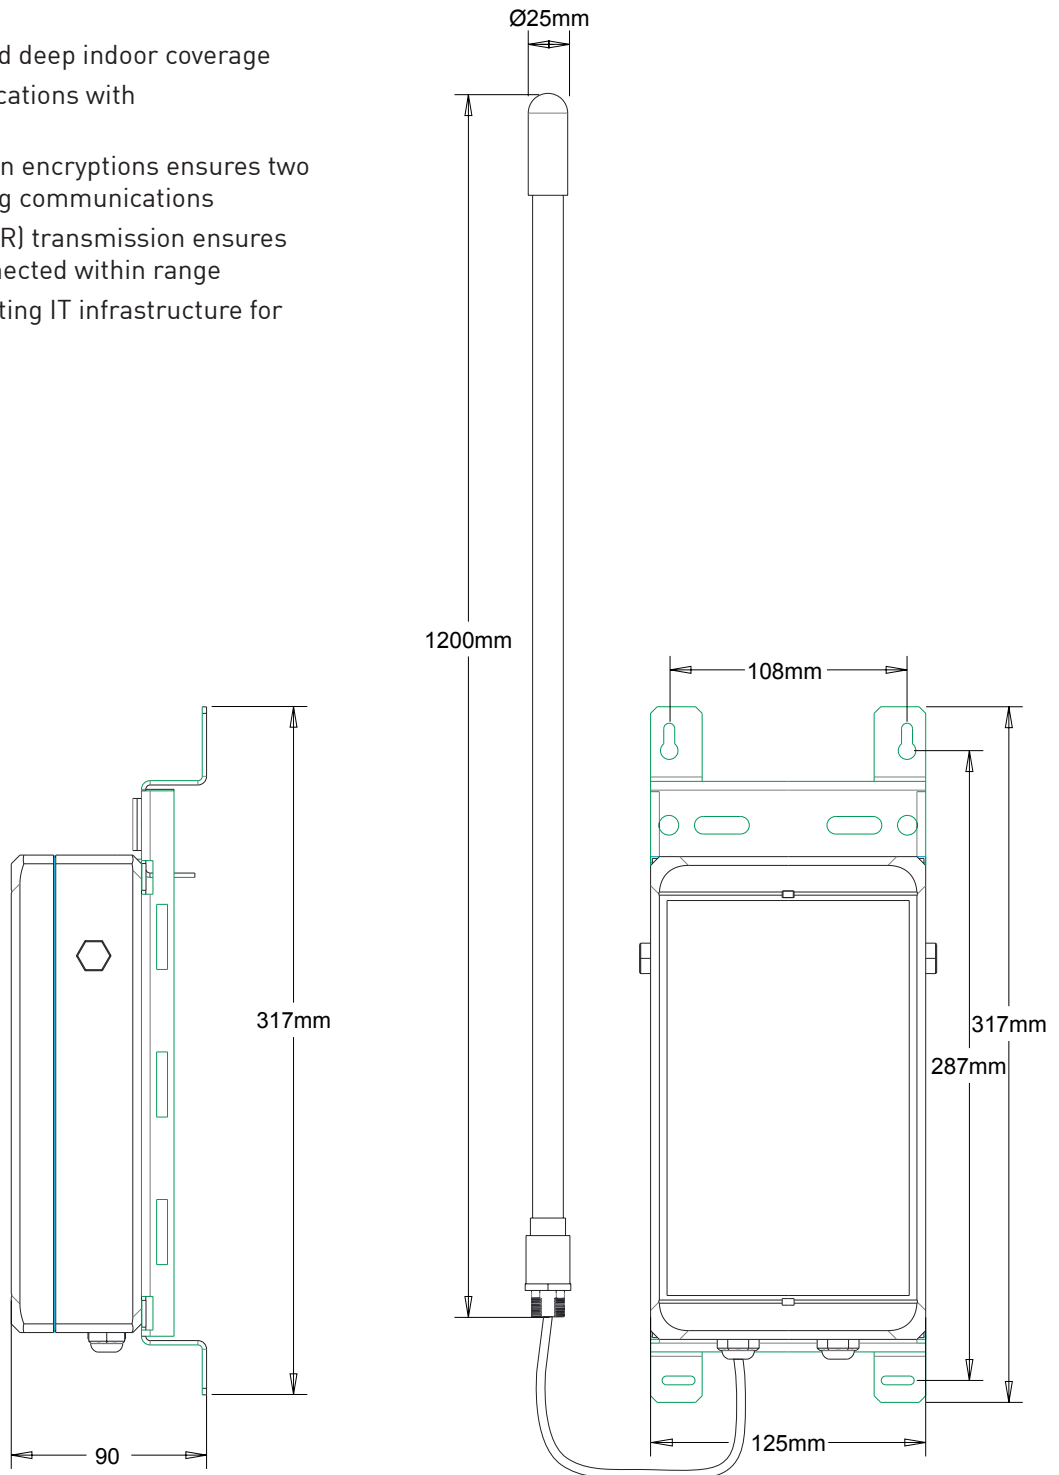

Legrand - AUS  
1300 369 777  
www.legrand.com.au  
ABN 31 000 102 661

Legrand - NZ  
0800 476 009  
www.legrand.co.nz

Refer to your group buying office, Legrand Sales Representative or Legrand Sales Office for pricing.